
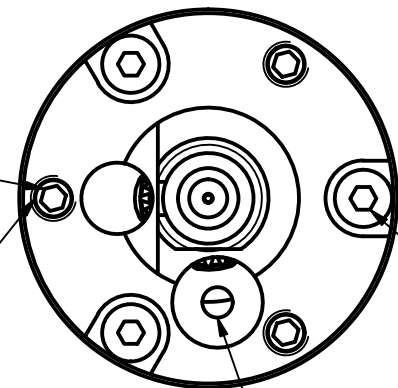


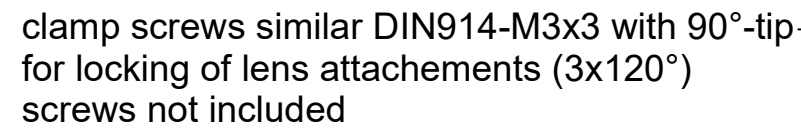

Rotation of the quarter wave plate
with adjustment key ④

Tension scREW M2 max.torque 40Ncm


clamp screws for locking optics position (2x120°)-
using hex-key size 1.5mm
50HD-15 ① adjustment of focus see

adjustment of focus setting —
using eccentric-key 55EX-5 ③


Fiber receptacle—
type FC-PC
(wide key)

Stop screw (2x120°) for lock/unlock
of the rotation of the
quarter wave plate
with screw driver 1.2mm 9D-12 ②

! Don't touch any other screws !

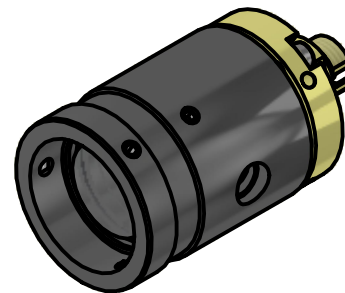

hex-key size 1.5mm 50HD-15	screw driver size 1.2mm 9D-12	eccentric-key 55EX-5	Adjustment key 60Z-2803
----------------------------------	-------------------------------------	-------------------------	----------------------------

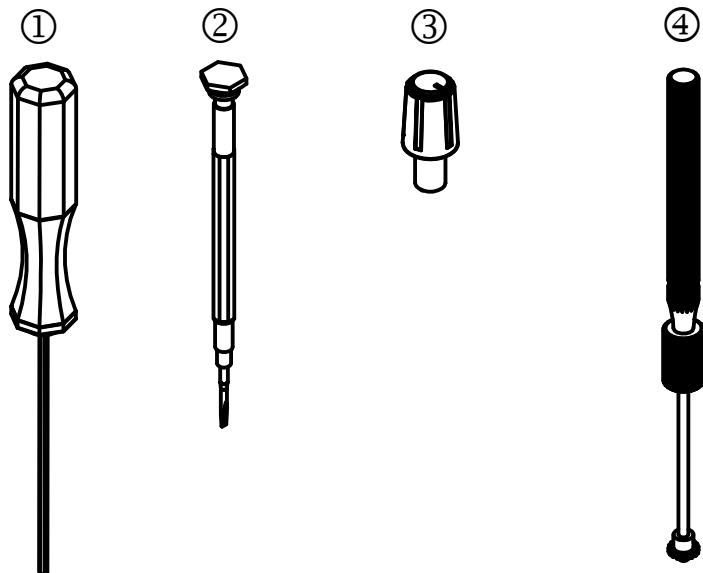

						Allgemeintoleranz ISO 2768 - f		Maßstab: 2:1			
								60FC-Q-0-M20L-xx 60FC-Q-0-M25-xx 60FC-Q-0-M30-01/02/03/04			
					Datum	Name		Fiber collimator f'20-30mm Fiber receptacle type FC-Q-0-xx			
				Bearb.	24.06.2025	Tp					
				Gepr.							
				Norm							
						Schäfer&Kirchhoff OPTO-SENSORIK UND MESSTECHNIK OPTIK-ENTWICKLUNG/ELEKTRONIK/MESSTECHNIK/SOFTWARE				Blatt A3	
								9803-1223-8900		Blatt: 2	
Zust.	Änderungen	Datum	Name	Datei: 980312238900.idw			Model: 980312238900.iam				