

13LR12-S1000+55CM-488-42-O09-T15-P-6

Laser Micro Line Generator with a fan angle



FEATURES

Laser line with a fan angle and approx. uniform intensity distribution.

Line length: 201 mm
Line width: 200 μm
Wavelength: 488 nm
Working distance: 977 mm

 Micro Line Generator for small laser line widths and high power density in the focal plane



DESCRIPTION

The laser diode beam source type 13LR12-S1000+55CM-488-42-O09-T15-P-6 has a fan angle of 12° with a constant line width and approx. uniform intensity distribution along the laser line.

The fine-structure is a <u>chain of equidistant dots</u> with a spacing of approx. the line width. The line width is constant along the laser line. Across the laser line the intensity distribution is Gaussian.

The laser has integrated electronics <u>type P</u> with micro-controller for control of the laser output power. The output power can be controlled using the <u>modulation input ports (TTL and analog)</u> or manually using the potentiometer.

The working distance can be adjusted by adjusting the focus setting. Please note that beam parameters like line length and line width increase proportionally to the working distance.




A fine-adjustment of the distance between laser and target is recommended for fine-focusing.

TECHNICAL DATA

13LR12-S1000+55CM-488-42-O09-T15-P-6

Series	13LR	
Order Code	13LR12-S1000+55CM-488-42-O09-T15-P-6	
Line profile	Constant Intensity Distribution	
Line type	Laser Micro Line	
Wavelength	488 +2/-2 nm	
Laser output power	42 mW	
Laser safety class	3В	
Fan angle α	12 deg	
Focussing range	815-1295 mm	
Working distance	977 mm	
Line length	201 mm	
Line width	0.2 mm	
Rayleigh range	129 mm	
Edge intensity	80 %	
Diameter laser module	25/28 mm	
Module length	75.9 mm	
Installation length	1082.9 mm	
Cable length	1.5 m	
Connector type	Lumberg SV50 IEC 61076-2-106	
Supply voltage	5 ± 0.2 V	
Max. current consumption	0.5 A	
Working temperature	15 - 40 °C	
Modulation inputs	Analog	TTL
Input resistance	9 kOhm	9 kOhm
Max. modulation frequency	0.01 kHz	250 kHz
Modulation delay ON/OFF	3000/3000 μs	0.5/0.2 μs
Rise / Fall time	40000/40000 μs	0.5/0.5 μs

Dimensions (for a complete dimensional drawing please refer to the downloads section)

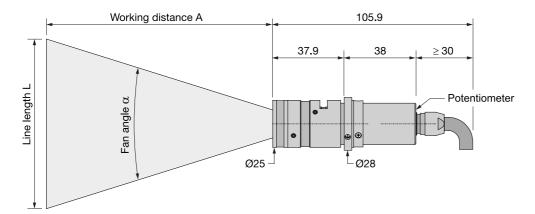

DOWNLOADS



ACCESSORIES

50HD-15 Hex key WS 1.5

9D-12 Screwdriver WS 1.2

Mounting Console with flat base plate 13MK-25-36-10-F

Mounting Console with base plate with dovetail 13MK-25-36-10-M

profile

Power Supply 5 V PS051003E

RELATED PRODUCTS

LASER MODULES Macro Line Generator, fan angle **SERIES 13LRM**

Uniform intensity distribution

Extended depth of focus

LASER MODULES • Micro Line, small fan angle **SERIES 13LN** Uniform intensity distribution

Thin lines



LASER MODULES • Compact Micro Line, small fan angle

SERIES 5LM+25CM • Gaussian intensity distribution

LASER MODULES • Compact Micro Line, large fan angle

SERIES 5LP+25CM • Gaussian intensity distribution

LASER MODULES • Micro Line, small fan angle

SERIES 5LM • Gaussian intensity distribution

LASER MODULES • Micro Line, large fan angle

SERIES 5LP • Gaussian intensity distribution

This is a printout of the page $\underline{\text{https://sukhamburg.com/products/details/13LR12-S1000}}$ 55CM-488-42-O09-T15-P-6 from 4/16/2024

CONTACT

For more information please contact:

Schäfter + Kirchhoff GmbH

Kieler Str. 212 22525 Hamburg Germany

Tel: +49 40 85 39 97-0 Fax: +49 40 85 39 97-79

info@sukhamburg.de www.sukhamburg.com

LEGAL NOTICE

Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [more]