

## 13LTM-165-41+90CM-450-13-O06-M60-PS-7

Semi-telecentric Macro Line Generator Semi-telecentric Macro Line Generator




### FEATURES

Semi-telecentric laser line with constant line length 15mm, approx. uniform intensity distribution and extended depth of focus.

- Line length: 15 mm
- Line width: 27  $\mu\text{m}$
- Wavelength: 450 nm
- Working distance: 156 mm
- Depth of focus: 3.41 mm

- Macro Line Generator for extended depth of focus
- With RS232 interface



## DESCRIPTION

The laser diode beam source type 13LTM-165-41+90CM-450-13-O06-M60-PS-7 produces a semi-telecentric laser line with 15 mm line length and extended depth of focus. The intensity profile is approx. uniform in line direction. More precisely, it is Gaussian clipped by an aperture with an edge intensity of 75 %. The line width is constant along the laser line. Across the laser line the intensity distribution is approx. Gaussian.

The laser has integrated electronics [type PS](#) with micro-controller for control of the laser output power and serial interface (RS232). The output power can be controlled using the [modulation input ports \(TTL and analog\)](#) or manually using the potentiometer.


For this laser type the working distance is fixed. A fine-adjustment of the distance between laser and target is recommended for fine-focusing in order to achieve minimal line width.

## TECHNICAL DATA

13LTM-165-41+90CM-450-13-O06-M60-PS-7

<b>Series</b>	13LTM	
<b>Order Code</b>	13LTM-165-41+90CM-450-13-O06-M60-PS-7	
<b>Line profile</b>	Constant Intensity Distribution	
<b>Line type</b>	Laser Macro Line	
<b>Wavelength</b>	450 +10/-10 nm	
<b>Laser output power</b>	13 mW	
<b>Laser safety class</b>	3B	
<b>Focussing range</b>	156-156 mm	
<b>Working distance</b>	156 mm	
<b>Line length</b>	15 mm	
<b>Line width</b>	0.027 mm	
<b>Depth of focus</b>	3.41 mm	
<b>Edge intensity</b>	75 %	
<b>Diameter laser module</b>	25/28 mm	
<b>Module length</b>	127.3 mm	
<b>Installation length</b>	313.3 mm	
<b>Cable length</b>	1.5 m	
<b>Connector type</b>	Lumberg SV70 IEC 61076-2-106	
<b>Supply voltage</b>	5 ± 0.2 V	
<b>Max. current consumption</b>	0.5 A	
<b>Working temperature</b>	15 - 40 °C	
<b>Modulation inputs</b>	Analog	TTL
<b>Input resistance</b>	9 kOhm	9 kOhm
<b>Max. modulation frequency</b>	0.001 kHz	250 kHz
<b>Modulation delay ON/OFF</b>	3000/3000 µs	0.6/0.2 µs
<b>Rise / Fall time</b>	200000/200000 µs	0.2/0.2 µs
<b>Interface</b>	RS232	

Dimensions (for a complete dimensional drawing please refer to the downloads section)

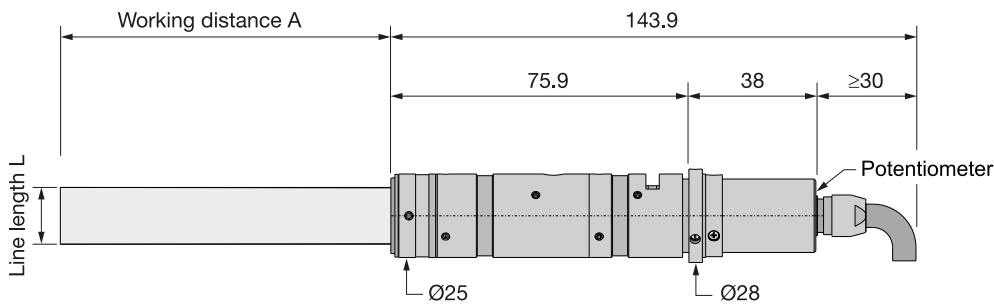

## DOWNLOADS



[951210000045.pdf](#)

## ACCESSORIES

- 9D-12**                                      Screwdriver WS 1.2
  
- PS051007E**                                Power Supply 5 V for laser modules with RS232 interface

## RELATED PRODUCTS

- LASER MODULES  
SERIES 13LT**
  - Semi-telecentric Micro Line
  - Uniform intensity distribution
  - Constant line length **15 mm**
  
- LASER MODULES  
SERIES  
LNC-13LTM**
  - Semi-telecentric Macro Line
  - Uniform intensity distribution
  - Constant line length **15 mm**
  - Extended depth of focus
  - Low noise
  
- LASER MODULES  
SERIES 5LTM-1+25CM**
  - **Compact** semi-telecentric Macro Line
  - Gaussian intensity distribution
  - Constant line length ca. **4.8 mm**
  - Extended depth of focus

**LASER MODULES**  
**SERIES 5LTM-2+25CM**

- **Compact** semi-telecentric Macro Line
- Gaussian intensity distribution
- Constant line length ca. **2 mm**
- Extended depth of focus

**LASER MODULES**  
**SERIES 5LTM-1**

- Semi-telecentric Macro Line
- Gaussian intensity distribution
- Constant line length ca. **4.8 mm**
- Extended depth of focus

**LASER MODULES**  
**SERIES 5LTM-2**

- Semi-telecentric Macro Line
- Gaussian intensity distribution
- Constant line length ca. **2 mm**
- Extended depth of focus

This is a printout of the page [https://sukhamburg.com/products/details/13LTM-165-41\\_90CM-450-13-O06-M60-PS-7](https://sukhamburg.com/products/details/13LTM-165-41_90CM-450-13-O06-M60-PS-7) from 12/5/2023

## CONTACT

For more information please contact:

Schäfter + Kirchhoff GmbH  
Kieler Str. 212  
22525 Hamburg  
Germany  
Tel: +49 40 85 39 97-0  
Fax: +49 40 85 39 97-79

[info@sukhamburg.de](mailto:info@sukhamburg.de)  
[www.sukhamburg.com](http://www.sukhamburg.com)

## LEGAL NOTICE

**Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.**

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [\[more\]](#)