

13M-M125-26-S

Micro Focus Optics



FEATURES

Micro focus optics used for focussing the collimated radiation exiting a fiber collimator.

- Attachment optics for fiber collimators type [60FC-L](#) or [60FC-T](#) with outer diameter Ø 25 mm
- Focal length $f' = 125$ mm
- AR Coating 420 - 700 nm
- Achromatic correction

DESCRIPTION

The Micro Focus Optics type 13M-M125-26-S is used to generate a small laser spot from the collimated radiation of a fiber collimator.

The [size of the spot](#) and its [Rayleigh range](#) is determined by the fiber properties and by the focal lengths of the fiber collimator and of the micro focus optics. For single-mode fibers the Gaussian intensity distribution and beam shape are maintained.

It is designed for the fiber collimators series [60FC-L](#) or [60FC-T](#) with an outer diameter Ø 25 mm.

Adjustment:

In order to change the working distance of the Micro Focus Optics the lens position of the adjacent collimator has to be readjusted.

Housing material:

As standard, the housing of the Micro Focus Optics is made of nickel silver.

For amagnetic fiber collimators Schäfter+Kirchhoff offers Micro Focus Optics with housings made of titanium.

TECHNICAL DATA

13M-M125-26-S


Series

13M

Order Code

13M-M125-26-S

| | |
|---|-----------------------|
| Focal length | 125 mm |
| Working distance A | 119.2 ± 0.2 mm |
| AR coating | 26 |
| Wavelength range | 420 - 700 nm |
| Lens type | Doublet optics |
| Correction | Achromatic |
| Numerical aperture | 0.06 |
| Clear aperture | Ø 15 mm |
| Outer diameter | Ø 25 mm |
| Length B | 8 mm |
| System mount | Ø 19.5 mm |
| Front fitting | - |
| Housing material | Nickel silver / steel |
| Weight | 30 g |
| RoHS compliant | |
| Dimensions (for a complete dimensional drawing please refer to the downloads section) | |

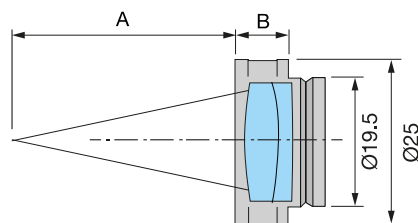

DOWNLOADS



[940130018200.pdf \(Dimensional drawing\).](#)



[Coating-2601-02.pdf \(Coating curve\).](#)

ACCESSORIES

50HD-15

Hex key WS 1.5

RELATED PRODUCTS

**MICRO FOCUS OPTICS
SERIES 13M**for transforming a collimated beam into a micro focus
spot**ATTACHMENT OPTICS
SERIES 13**to attach in the front of collimators with system mount
Ø19.5 mm

This is a printout of the page <https://sukhamburg.com/products/details/13M-M125-26-S> from 5/4/2024

CONTACT

For more information please contact:

Schäfter + Kirchhoff GmbH

Kieler Str. 212

22525 Hamburg

Germany

Tel: +49 40 85 39 97-0

Fax: +49 40 85 39 97-79

info@sukhamburg.de

www.sukhamburg.com

LEGAL NOTICE

Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [\[more\]](#)