


48-FPC-1-2-xxx_Mod01

Fiber Port Cluster 1 → 2 with shutters

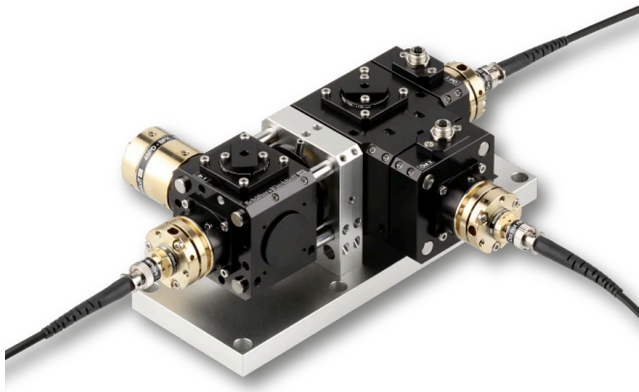

FEATURES

Fiber Port Cluster for one input source

- Configuration 1 → 2
- Electro-magnetic shutters at the two output ports
- Highly efficient coupling into polarization-maintaining fiber cables
- Adjustable splitting ratio
- Compact, rugged, transportable and sealed opto-mechanical units
- Fully fiber-coupled
- Very high long-term stability, efficiency and reproducibility

DESCRIPTION

This Fiber Port Clusters 1 → 2 Mod01 is a compact opto-mechanical unit that splits a fiber-coupled source into 2 output fiber cables with high efficiency and variable splitting ratio. An electro-magnetic shutter is placed at each of the two output ports.

Optical Setup

The input port is fiber-coupled to a [PM fiber cable](#). A polarizer defines the input polarization which is necessary for a long term stable splitting ratio.

A photo diode right after the input port allows for a continuous monitoring of the radiation. Subsequently, the radiation splitting is achieved by using a rotary half-wave plate in combination with a polarization beam splitter. By use of the rotary half-wave plate, almost any desired splitting ratio can be achieved.

At the output ports further polarizers are placed in order to define the polarization at output of the system.

Fiber Couplers

A fundamental component of a Fiber Port Cluster is the [Laser Beam Coupler](#), which is the input into the opto-mechanical unit collimating the input radiation and, finally, couples the radiation back into the polarization-maintaining fiber cables. The stability of the total Fiber Port Cluster is determined by the [stability](#) of the laser beam coupler.


Electro-magnetic Shutters

An electro-magnetic shutter is placed at each of the two output ports. For a description and further technical specifications, please refer to the electro-magnetic shutter type [48EMS-6](#).

How to order

For a detailed quotation please additionally specify

- Wavelength
- Cable lengths
- Connector types

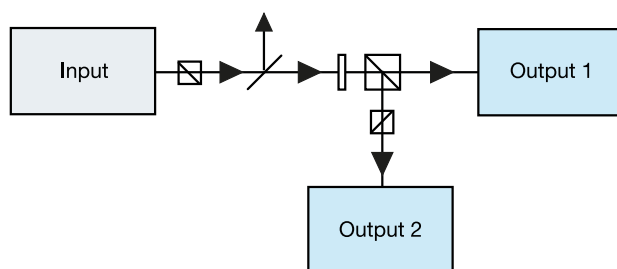**TECHNICAL DATA**

48-FPC-1-2-xxx_Mod01

Order code	48-FPC-1-2-xxx_Mod01
Configuration	1 → 2
	electro-magnetic shutters
Wavelengths*	461, 689, 767, 780, 852 nm
Fiber type	polarization-maintaining
Connector type	FC APC (standard)
Cable lengths	customer-specific
Wave plate type	low-order
Power monitor	BPX-61 (SMA)
Transmission	≥ 75 % @ 780 nm
Polarization Extinction Ratio	≥ 23 dB @ 780 nm
Balancing	better 3 %
* Different wavelength combinations on request	

Dimensions (w/o fiber cables)

180 x 125 x 70 mm

TECHNOTES

- [Article - Fiber Port Cluster](#)
[Rugged, modular and fiber coupled beam splitting and combining units](#)
- [Connecting multicube assemblies to a base plate](#)
[How to connect the self-supporting multicube system](#)

DOWNLOADS

[980129090619_kuz.pdf \(Dimensional drawing\).](#)[Article_Cluster.pdf \(Technote\).](#)

RELATED PRODUCTS

**FIBER COLLIMATOR
60FC-Q**

Fiber Collimator for collimating large beam diameters
and with integrated quarter-wave plate

**POLARIZATION
ANALYZER SK010PA**

Measurement tool for coupling into polarization-
maintaining fiber cables

**FIBER COLLIMATOR
SERIES 60FC-SF**

Fiber Collimator/Fiber Coupler with super-fine thread

**ELECTRO-MAGNETIC
SHUTTER 48EMS-6****48-FPC-1-2-XXX**

Fiber Port Cluster 1 → 2

This is a printout of the page https://sukhamburg.com/products/details/48-FPC-1-2-xxx_Mod01 from 5/5/2024

CONTACT

For more information please contact:

Schäfter + Kirchhoff GmbH

Kieler Str. 212

22525 Hamburg

Germany

Tel: +49 40 85 39 97-0

Fax: +49 40 85 39 97-79

info@sukhamburg.de

www.sukhamburg.com

LEGAL NOTICE

Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [\[more\]](#)