

## 51nano-S-405-1-Y07-P-12-4-28-0-150

Fiber-coupled low coherence laser source with polarization-maintaining fiber cable



### FEATURES

The Laser Diode Beam Source of type 51nano-S-405-1-Y07-P-12-4-28-0-150 has a [reduced power noise](#), [a reduced coherence length](#) and a [low speckle contrast](#).

- Reduced power noise: typ.  $< 0.1\%$  of  $P_0$  (RMS, Bandwidth  $< 1$  MHz)
- Reduced coherence length: coherence length  $\approx 300\ \mu\text{m}$
- Reduced speckle contrast
- Wavelength: 405 nm
- Laser output power: 1 mW
- Polarization-maintaining fiber cable
- FC APC connector (8°-polish) with [end cap](#)
- Modulation analog and TTL
- With interlock and key switch (conform to EN 60825-1)

Alternative: Laser Diode Beam Source [51nano-N](#) (OEM version w/o key switch and w/o interlock)

## DESCRIPTION

The fiber-coupled Laser Diode Beam Source of type 51nano-S-405-1-Y07-P-12-4-28-0-150 has a [reduced power noise](#) (typ.  $< 0.1\%$  of  $P_0$  (RMS, Bandwidth  $< 1$  MHz)), [reduced coherence length](#) ( $\approx 300\ \mu\text{m}$ ) and a [lowered speckle contrast](#).

### Electrical features

The output power is adjustable using a potentiometer or using the two modulation inputs for analog and TTL.

**Fiber cable**

The source is fiber-coupled to a polarization-maintaining fiber cable (standard, polarization extinction ratio  $\geq 21$  dB). As a result the beam profile is rotationally symmetric with Gaussian intensity distribution. The fiber cable is equipped with an FC APC type connector (8°-polish) and an [end cap](#) to prevent fiber damage. The fiber cable has a strain-relief and a protective sleeving ( $\varnothing 3$  mm). Standard cable length is 150 cm.

Options:


- Single-mode fiber
- Other connector types including FC PC, DIN or AVIO, or E2000
- Other fiber cable lengths
- Incorporated vacuum feed-through

**Laser safety**

The laser safety is conform to IEC 825 / EN 60825-1.

- Interlock chain for the remote deactivation of the laser
- Laser power-up is only possible using the key switch
- LED status indicator for "Laser ON"
- For a quick start the laser is shipped with a interlock connector type [BC0106F-iLCK](#)

An OEM version is available as type [51nano-N](#) without key switch or interlock which is not conform to EN 60825-1.

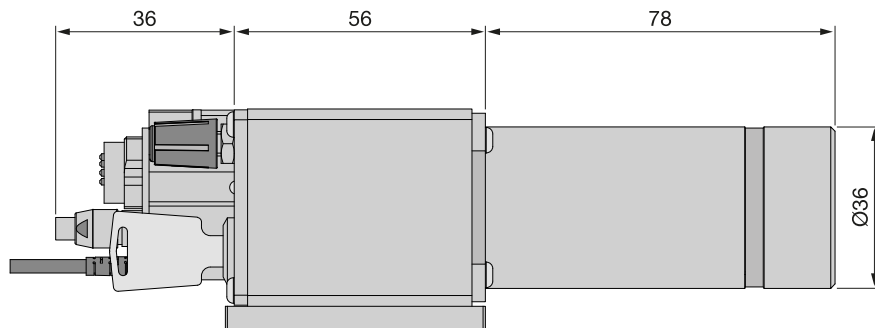**TECHNICAL DATA**

51nano-S-405-1-Y07-P-12-4-28-0-150


Order Code	51nano-S-405-1-Y07-P-12-4-28-0-150
Will replace	51nanoL-S-405-1-Y07-P-12-4-28-0-150
Series	<a href="#">51nano-S (PM)</a>
Laser class	2
Center Wavelength	$405 \pm 5$ nm
Bandwidth	0.7 - 4 nm

Output power	typ. 0.9 mW	
Power adjustment	< 1 - 100 %	
Power noise	typ. < 0.1 % of $P_0$ (RMS, BW < 1 MHz)	
Coherence length	$\approx 300 \mu\text{m}$	
Fiber cable	polarization-maintaining	
Fiber type	PMC-E-400Si	
Nominal fiber NA	0.11	
Effective fiber $NA_e^2$	$0.071 \pm 10 \% (1/e^2)$	
Mode field diameter MFD	$3.6 \mu\text{m} \pm 10 \% (1/e^2)$	
PER	$\geq 21 \text{ dB}$	
Fiber cable length	$1.5 \pm 0.05 \text{ m}$ (standard)	
Fiber cable type	$\varnothing 3 \text{ mm}$ with Kevlar strain-relief	
Fiber connector type	FC APC with end cap (standard)	
Power stability	max. 12 % power variation between 15°C and 35°C	
Electronics type	HP	
Electr. cable length	$1.5 \pm 0.1 \text{ m}$ (standard)	
Connector type	4 pin (male, Lumberg SV40)	
Supply voltage	$12.0 \pm 0.5 \text{ V}$	
Max. current consumption*	260 mA	
Modulation input connector	6 pin (male, Lumberg SV60)	
Modulation inputs	Analog	TTL
Max. input voltage	6.5 V	6.5 V
Voltage for $P_{\min} / P_0$	0 V / 2.5 V	< 0.8 V / > 3.0 V
Input impedance	9 kOhm	9 kOhm
Max. modulation frequency	1 Hz	300 kHz
Modulation delay ON/OFF*	< 2.0/0.5 ms	< 0.5/0.2 $\mu\text{s}$
Rise / fall time*	0.5/0.5 s	0.8/0.3 $\mu\text{s}$
* Typical value. Depends on laser diode.		
Operating temperature	$15 - 35^\circ\text{C} \pm 0.5^\circ\text{C}$	
Warm-up time	approx. 10 min	
Air humidity	max. 90 % non-condensing	
Weight	530 g	
Dimensions	50 x 58 x 166 mm	

Protection Class

IP30

Dimensions (for a complete dimensional drawing please refer to the downloads section)

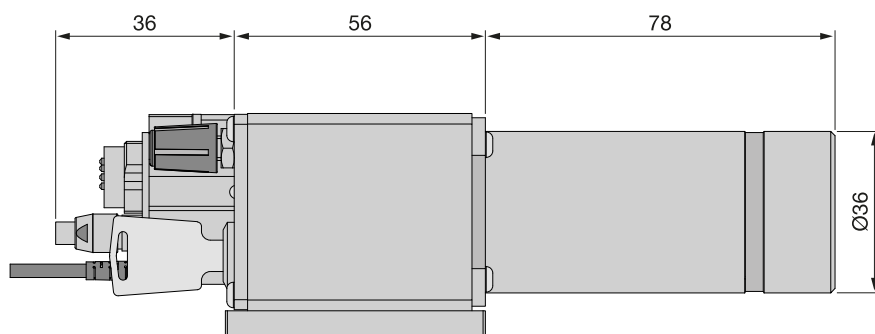

## TECHNOTES

- [Fiber-coupled low noise beam source](#)  
[Comparison of a low noise laser source to a conventional laser source](#)
- [51nano: Electronics Type HP](#)  
[Electronic features for electronics type HP](#)

## DOWNLOADS



[000829001100.pdf \(Dimensional drawing\)](#)



[Conformity\\_51nano\\_2023\\_E\\_web.PDF \(CE certificate\)](#)

## ACCESSORIES

**PS120516E**

Power Supply 12 V

**BC0106F-ILCK**

Interlock connector

**FIBER COLLIMATORS  
SINGLE-MODE/PM**

Fiber Collimators for collimating light exiting a single-mode or polarization-maintaining fiber cable

## RELATED PRODUCTS

**51NANO-S (SINGLE-MODE)**

Fiber-coupled low coherence laser source with single-mode fiber cable

**51NANO-N (POLARIZATION-MAINTAINING, OEM)**

Fiber-coupled low coherence laser source with polarization-maintaining fiber cable (OEM version)

**51NANOFI-S WITH FARADAY ISOLATOR (PM)**

Fiber-coupled low coherence laser source with polarization-maintaining fiber cable

This is a printout of the page <https://sukhamburg.com/products/details/51nano-S-405-1-Y07-P-12-4-28-0-150> from 4/19/2024

## CONTACT

For more information please contact:

Schäfter + Kirchhoff GmbH

Kieler Str. 212

22525 Hamburg

Germany

Tel: +49 40 85 39 97-0

Fax: +49 40 85 39 97-79

[info@sukhamburg.de](mailto:info@sukhamburg.de)

[www.sukhamburg.com](http://www.sukhamburg.com)

## LEGAL NOTICE

**Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.**

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [\[more\]](#)