


## 5LMM8-S150-1+55CM-830-23-H19-A8-C-6

Macro Line Generator with a fan angle

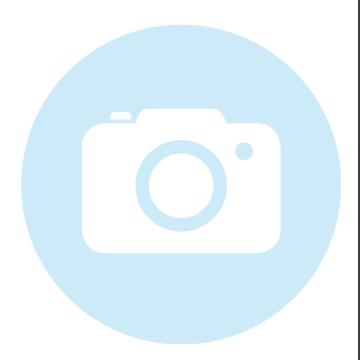

#### **FEATURES**

Laser line with a fan angle, Gaussian intensity distribution and extended depth of focus.

Line length: 21.8 mm
Line width: 180 µm
Wavelength: 830 nm
Working distance: 138 mm
Depth of focus: 83.2 mm

Macro Line Generator for extended depth of focus



### DESCRIPTION

The laser diode beam source type 5LMM8-S150-1+55CM-830-23-H19-A8-C-6 has a fan angle of  $8^{\circ}$  and an extended depth of focus.

The intensity profile is Gaussian in line direction clipped by an aperture with an edge intensity of 15 %. The line width is constant along the laser line. Across the laser line the intensity distribution is approx. Gaussian.

The laser has integrated electronics <u>type C</u> for control of the laser output power. The output power can be controlled using the <u>modulation input ports (TTL and analog)</u> or manually using the potentiometer.

The working distance can be adjusted by adjusting the focus setting. Please note that beam parameters like line length and line width increase proportionally to the working distance. A fine-adjustment of the distance between laser and target is recommended for fine-focusing.



# **TECHNICAL DATA**

5LMM8-S150-1+55CM-830-23-H19-A8-C-6

eries 5LMM			
Order Code	5LMM8-S150-1+55CM-830-23-H19-A8-C-6		
Line profile	Gaussian Intensity Distribution		
Line type	Laser Macro Line		
Wavelength	830 +10/-10 nm		
Laser output power	23 mW		
Laser safety class	3В		
Fan angle α	8 deg		
Focussing range	115-250 mm		
Working distance	138 mm		
Line length	21.8 mm		
Line width	0.18 mm		
Depth of focus	83.2 mm		
Edge intensity	15 %		
Diameter laser module	25/28 mm		
Module length	78.5 mm		
Installation length	246.5 mm		
Cable length	1.5 m		
Connector type	Lumberg SV50 II	Lumberg SV50 IEC 61076-2-106	
Supply voltage	5 ± 0.2 V		
Max. current consumption	0.25 A		
Working temperature		0 - 40 °C	
Modulation inputs	Analog	TTL	
Input resistance	22 kOhm	22 kOhm	
Max. modulation frequency	100 kHz	100 kHz	
Modulation delay ON/OFF	1/0.5 μs	2/1 μs	
Rise / Fall time	3/2 μs	3/2 μs	

# **ACCESSORIES**

50HD-15

Hex key WS 1.5



Screwdriver WS 1.2 9D-12

13MK-25-36-10-F Mounting Console with flat base plate

Mounting Console with base plate with dovetail 13MK-25-36-10-M

profile

PS051003E Power Supply 5 V

## **RELATED PRODUCTS**

LASER MODULES

**SERIES 5LM** 

Micro Line, small fan angle

Gaussian intensity distribution

**LASER MODULES** 

**SERIES LNC-5LMM** 

Macro Line, small fan angle

Gaussian intensity distribution

Extended depth of focus

Low Noise

LASER MODULES

**SERIES 13LRM** 

Macro Line Generator, fan angle

Uniform intensity distribution

Extended depth of focus

LASER MODULES **SERIES 13LNM** 

Micro Line Generator, small fan angle

Uniform intensity distribution

Extended depth of focus

LASER MODULES **SERIES 5LPM+25CM**  Compact Macro Line, large fan angle

Gaussian intensity distribution

Extended depth of focus

LASER MODULES SERIES 5LMM+25CM Compact Micro Line, small fan angle

Gaussian intensity distribution

Extended depth of focus

LASER MODULES **SERIES 5LPM** 

Macro Line, large fan angle

Gaussian intensity distribution

Extended depth of focus



This is a printout of the page <a href="https://sukhamburg.com/products/details/5LMM8-S150-1\_55CM-830-23-H19-A8-C-6">https://sukhamburg.com/products/details/5LMM8-S150-1\_55CM-830-23-H19-A8-C-6</a> from 4/24/2024

### CONTACT

For more information please contact: Schäfter + Kirchhoff GmbH Kieler Str. 212 22525 Hamburg Germany

Tel: +49 40 85 39 97-0 Fax: +49 40 85 39 97-79

info@sukhamburg.de www.sukhamburg.com

# **LEGAL NOTICE**

#### Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [more]