


5LPM80-S000-1+25CM-640-18-H22-A8-S-6

Compact Macro Line Generator with a large fan angle

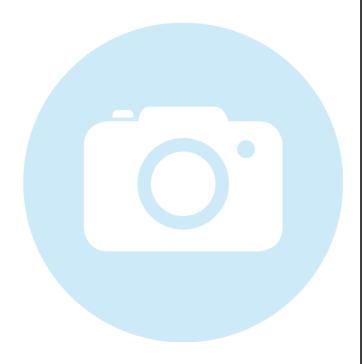

FEATURES

Compact laser line with a large fan angle, Gaussian intensity distribution, and extended depth of focus.

Line length: 1800 mm
Line width: 926 µm
Wavelength: 640 nm
Working distance: 1000 mm
Depth of focus: 1500 mm

Macro Line Generator for extended depth of focus



DESCRIPTION

The laser diode beam source type 5LPM80-S000-1+25CM-640-18-H22-A8-S-6 has a fan angle of 84° and an extended depth of focus.

The intensity profile is Gaussian in line direction clipped by an aperture with an edge intensity of 14 %. The line width is constant along the laser line. Across the laser line the intensity distribution is approx. Gaussian.

The laser has integrated electronics $\underline{type\ S}$ for control of the laser output power. The output power can be controlled using the $\underline{modulation\ input\ ports\ (TTL\ and\ analog)}$ or manually using the potentiometer.



The working distance can be adjusted by adjusting the focus setting. Please note that beam parameters like line length and line width increase proportionally to the working distance. A fine-adjustment of the distance between laser and target is recommended for fine-focusing.

TECHNICAL DATA

5LPM80-S000-1+25CM-640-18-H22-A8-S-6

	5LPM
5LPM80-S000-1+25CM-640-18-H22-A8-S-6	
Gaussian Intensity Distribution	
Laser Macro Line	
640 +5/-5 nm	
18 mW	
	3B
	84 deg
Focussing range 450-inf mm	
Working distance 1000 mm	
th 1800 mm	
0.926 mm	
1500 mm	
14 %	
12 mm	
79.1 mm	
1109.1 mm	
	1.5 m
Lumberg SV50 IEC 61076-2-106	
5 ± 0.25 V	
0.25 A	
	0 - 40 °C
Analog	TTL
22 kOhm	22 kOhm
50 kHz	1000 kHz
4/0.5 μs	0.05/0.05 μs
5/4 μs	0.1/0.02 μs
	Gaussian Inter

ACCESSORIES

60EX-4 Eccentric key with a stroke of \pm 0.5 mm.

60EX-4-L Alternative eccentric key with long handle with a

stroke of ± 0.5 mm.

9D-12 Screwdriver WS 1.2

13MK-25-36-10-F Mounting Console with flat base plate

13MK-25-36-10-M Mounting Console with base plate with dovetail

profile

PS051003E Power Supply 5 V

RELATED PRODUCTS

LASER MODULES SERIES 5LPM Macro Line, large fan angle

Gaussian intensity distribution

Extended depth of focus

LASER MODULES SERIES LNC-5LPM Macro Line, large fan angle

Gaussian intensity distribution

Extended depth of focus

Low noise

LASER MODULES SERIES 13LRM Macro Line Generator, fan angle

Uniform intensity distribution

Extended depth of focus

LASER MODULES
SERIES 13LNM

Micro Line Generator, small fan angle

Uniform intensity distribution

Extended depth of focus

LASER MODULES
SERIES 5LMM+25CM

Compact Micro Line, small fan angle

Gaussian intensity distribution

Extended depth of focus

LASER MODULES SERIES 5LPM+25CM Compact Macro Line, large fan angle

Gaussian intensity distribution

Extended depth of focus



LASER MODULES
SERIES 5LMM

- Macro Line, small fan angle
- Gaussian intensity distribution
- Extended depth of focus

This is a printout of the page https://sukhamburg.com/products/details/5LPM80-S000-1 25CM-640-18-H22-A8-S-6 from 4/24/2024

CONTACT

For more information please contact: Schäfter + Kirchhoff GmbH Kieler Str. 212 22525 Hamburg Germany

Tel: +49 40 85 39 97-0 Fax: +49 40 85 39 97-79

info@sukhamburg.de www.sukhamburg.com

LEGAL NOTICE

Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [more]