

#### 5M-A18+55CM-488-42-009-A7.5-P-6

Compact Laser Micro Focus Generator with elliptical Gaussian beam profile

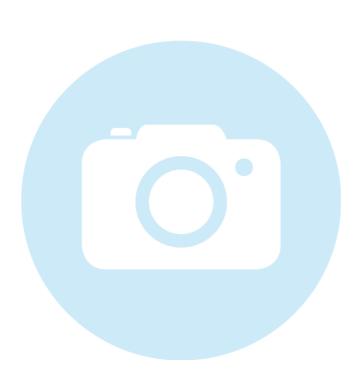

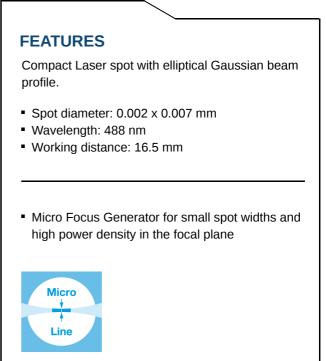

#### DESCRIPTION

The laser diode beam source type 5M-A18+55CM-488-42-O09-A7.5-P-6 produces an elliptical laser spot with elliptical Gaussian intensity distribution.

The laser has integrated electronics <u>type P</u> with micro-controller for control of the laser output power. The output power can be controlled using the <u>modulation input ports (TTL and analog)</u> or manually using the potentiometer.

The working distance can be adjusted by adjusting the focus setting. Please note that the spot diameter increases proportionally to the working distance. A fine-adjustment of the distance between laser and target is recommended for fine-focusing.

# **TECHNICAL DATA**

5M-A18+55CM-488-42-O09-A7.5-P-6

Series

5M



## **DATA SHEET**

Line profileGaussian Intensity DistributionWavelength488 +2/-2 nmLaser output power42 mWLaser output power42 mWLaser safety class38Focussing range15-35 mmWorking distance16.5 mmSpot height0.007 mmSpot width0.002 mmDiameter laser module25/28 mmModule length76.4 mmInstallation length122.9 mmCable length15.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHz3000/3000 µs0.50.2 µsRise / Fall time40000/4000 µs0.50.5 µs	Order Code	5M-A18+55CM-488-42-009-A7.5-P-6	
Laser output power42 mWLaser safety class3BFocussing range15-35 mmWorking distance16.5 mmSpot height0.007 mmSpot width0.002 mmRayleigh range0.02 mmDiameter laser module25/28 mmModule length76.4 mmInstallation length122.9 mmCable length1.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHz3000/3000 µs0.50.2 µs	Line profile	Gaussian Intensity Distribution	
Laser safety class3BFocussing range15-35 mmWorking distance16.5 mmSpot height0.007 mmSpot width0.002 mmRayleigh range0.02 mmDiameter laser module25/28 mmModule length76.4 mmInstallation length122.9 mmCable length1.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5AWorking temperature15 - 40 °CModulation inputsAnalogTTLInput resistance9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHz3000/3000 µs0.50.2 µs	Wavelength	488 +2/-2 nm	
Focussing range15-35 mmWorking distance16.5 mmSpot height0.007 mmSpot width0.002 mmRayleigh range0.02 mmDiameter laser module25/28 mmModule length76.4 mmInstallation length122.9 mmCable length1.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHz3000/3000 µs0.5/0.2 µs	Laser output power	42 mW	
Working distance16.5 mmSpot height0.007 mmSpot width0.002 mmRayleigh range0.02 mmDiameter laser module25/28 mmModule length76.4 mmInstallation length122.9 mmCable length1.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHz3000/3000 µs0.5/0.2 µs	Laser safety class	3B	
Spot height0.007 mmSpot width0.002 mmRayleigh range0.02 mmDiameter laser module25/28 mmModule length76.4 mmInstallation length122.9 mmCable length1.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5 AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHz3000/3000 µs0.5/0.2 µs	Focussing range	15-35 mm	
Spot width0.002 mmRayleigh range0.02 mmDiameter laser module25/28 mmModule length76.4 mmInstallation length122.9 mmCable length1.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5 AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHz3000/3000 µs0.5/0.2 µs	Working distance	16.5 mm	
Rayleigh range0.02 mmDiameter laser module25/28 mmModule length76.4 mmInstallation length122.9 mmCable length1.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5 AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHz3000/3000 µs0.5/0.2 µs	pot height 0.007 mm		
Diameter laser module25/28 mmModule length76.4 mmInstallation length122.9 mmCable length1.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5 AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHzModulation delay ON/OFF3000/3000 µs	Spot width	0.002 mm	
Module length76.4 mmInstallation length122.9 mmCable length1.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5 AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHz3000/3000 µs0.5/0.2 µs	Rayleigh range	0.02 mm	
Installation length122.9 mmCable length1.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5 AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHz3000/3000 μs0.5/0.2 μs	Diameter laser module	25/28 mm	
Cable length1.5 mConnector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5 AWorking temperature15 - 40 °CModulation inputsAnalogTTLInput resistance9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHzModulation delay ON/OFF3000/3000 µs0.5/0.2 µs	Module length	76.4 mm	
Connector typeLumberg SV50 IEC 61076-2-106Supply voltage5 ± 0.2 VMax. current consumption0.5 AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHzModulation delay ON/OFF3000/3000 µs	Installation length	122.9 mm	
Supply voltage5 ± 0.2 VMax. current consumption0.5 AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHzModulation delay ON/OFF3000/3000 µs	Cable length	1.5 m	
Max. current consumption0.5 AWorking temperature15 - 40 °CModulation inputsAnalogInput resistance9 kOhm9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHzModulation delay ON/OFF3000/3000 µs	Connector type	Lumberg SV50 IEC 61076-2-106	
Working temperature15 - 40 °CModulation inputsAnalogTTLInput resistance9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHzModulation delay ON/OFF3000/3000 µs0.5/0.2 µs	Supply voltage	5 ± 0.2 V	
Modulation inputsAnalogTTLInput resistance9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHzModulation delay ON/OFF3000/3000 μs0.5/0.2 μs	lax. current consumption 0.5 A		0.5 A
Input resistance9 kOhm9 kOhmMax. modulation frequency0.01 kHz250 kHzModulation delay ON/OFF3000/3000 μs0.5/0.2 μs	Working temperature	15 - 40 °C	
Max. modulation frequency0.01 kHz250 kHzModulation delay ON/OFF3000/3000 μs0.5/0.2 μs	Modulation inputs	Analog	TTL
Modulation delay ON/OFF         3000/3000 μs         0.5/0.2 μs	Input resistance	9 kOhm	9 kOhm
	Max. modulation frequency	0.01 kHz	250 kHz
Rise / Fall time         40000/40000 μs         0.5/0.5 μs	Modulation delay ON/OFF	3000/3000 μs	0.5/0.2 μs
I	Rise / Fall time	40000/40000 μs	0.5/0.5 μs

# ACCESSORIES

60EX-4	Eccentric key with a stroke of $\pm$ 0.5 mm.
60EX-4-L	Alternative eccentric key with long handle with a stroke of $\pm$ 0.5 mm.
9D-12	Screwdriver WS 1.2

## **RELATED PRODUCTS**





LASER MODULES SERIES 5MM	<ul> <li>Compact Laser Macro Focus Generator</li> <li>Circular beam profile and</li> <li>Extended depth of focus</li> </ul>
LASER MODULES SERIES 13MC	<ul> <li>Micro Focus Generator</li> <li>Rotationally symmetric, Gaussian beam profile</li> </ul>
LASER MODULES SERIES 5MC	<ul> <li>Compact Laser Micro Focus Generator</li> <li>Rotationally symmetric, Gaussian beam profile</li> </ul>
LASER MODULES SERIES 13M	<ul> <li>Micro Focus Generator</li> <li>Elliptical Gaussian beam profile</li> </ul>

This is a printout of the page <u>https://sukhamburg.com/products/details/5M-A18\_55CM-488-42-O09-A7\_5-P-6</u> from 5/2/2024

## CONTACT

For more information please contact: Schäfter + Kirchhoff GmbH Kieler Str. 212 22525 Hamburg Germany Tel: +49 40 85 39 97-0 Fax: +49 40 85 39 97-79

info@sukhamburg.de www.sukhamburg.com

# LEGAL NOTICE

#### Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [more]

