


### 5M-S88+55CM-450-57-O06-A7.5-PS-7

Compact Laser Micro Focus Generator with elliptical Gaussian beam profile

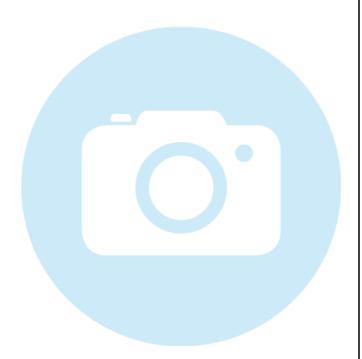

#### **FEATURES**

Compact Laser spot with elliptical Gaussian beam profile.

Spot diameter: 0.011 x 0.03 mm

Wavelength: 450 nmWorking distance: 82 mm

- Micro Focus Generator for small spot widths and high power density in the focal plane
- With RS232 interface





### DESCRIPTION

The laser diode beam source type 5M-S88+55CM-450-57-O06-A7.5-PS-7 produces an elliptical laser spot with elliptical Gaussian intensity distribution.

The laser has integrated electronics <u>type PS</u> with micro-controller for control of the laser output power and serial interface (RS232). The output power can be controlled using the <u>modulation input ports (TTL and analog)</u> or manually using the potentiometer.

The working distance can be adjusted by adjusting the focus setting. Please note that the spot diameter increases proportionally to the working distance. A fine-adjustment of the distance between laser and target is recommended for fine-focusing.

### **TECHNICAL DATA**

5M-S88+55CM-450-57-O06-A7.5-PS-7



Order Code 5 Line profile	M-S88+55CM-450-57 Gaussian Inter		
Line profile	Gaussian Inter	nsity Distribution	
		Gaussian Intensity Distribution	
Wavelength		450 +10/-10 nm	
Laser output power	57 mW		
Laser safety class	3B		
Focussing range	70-125 mm		
Working distance	82 mm		
Spot height	0.03 mm		
Spot width	0.011 mm		
Rayleigh range	0.438 mm		
Diameter laser module	25/28 mm		
Module length	73.1 mm		
Installation length	185.1 mm		
Cable length	1.5 m		
Connector type	Lumberg SV70 IEC 61076-2-106		
Supply voltage	5 ± 0.2 V		
Max. current consumption		0.5 A	
Working temperature		15 - 40 °C	
Modulation inputs	Analog	TTL	
Input resistance	9 kOhm	9 kOhm	
Max. modulation frequency	0.001 kHz	250 kHz	
Modulation delay ON/OFF	3000/3000 μs	0.6/0.2 μs	
Rise / Fall time	200000/200000 μs	0.2/0.2 μs	
Interface		RS232	

# **ACCESSORIES**

**60EX-4** Eccentric key with a stroke of  $\pm$  0.5 mm.

**60EX-4-L** Alternative eccentric key with long handle with a

stroke of ± 0.5 mm.

**9D-12** Screwdriver WS 1.2

# **RELATED PRODUCTS**



LASER MODULES Compact Laser Macro Focus Generator

SERIES 5MM • Circular beam profile and

Extended depth of focus

LASER MODULES • Micro Focus Generator

SERIES 13MC • Rotationally symmetric, Gaussian beam profile

LASER MODULES Compact Laser Micro Focus Generator

SERIES 5MC • Rotationally symmetric, Gaussian beam profile

LASER MODULES • Micro Focus Generator

SERIES 13M • Elliptical Gaussian beam profile

This is a printout of the page <a href="https://sukhamburg.com/products/details/5M-S88">https://sukhamburg.com/products/details/5M-S88</a> 55CM-450-57-006-A7 5-PS-7 from 4/20/2024

### **CONTACT**

For more information please contact:

Schäfter + Kirchhoff GmbH

Kieler Str. 212 22525 Hamburg Germany

Tel: +49 40 85 39 97-0 Fax: +49 40 85 39 97-79

info@sukhamburg.de www.sukhamburg.com

## **LEGAL NOTICE**

### Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [more]