

## 60FC-E-Q671-4-F30x90

Fiber collimator for an elliptical beam cross section with a circular state of polarization



### FEATURES

Fiber collimator for an elliptical beam cross section with a circular state of polarization

- Effective focal lengths  $f'$  30 x 90 mm
- Aspect ratio 1:3
- Integrated quarter-wave plate
- Designed and adjusted for the wavelength 671 nm
- Clear aperture  $\varnothing$  20 mm
- Receptacle for fiber connectors type FC APC

## DESCRIPTION

The fiber collimator generates a collimated beam with an elliptical cross section and a circular state of polarization. It is suitable for polarization-maintaining fiber cables and leads to a collimated beam with a Gaussian intensity profile and an elliptical beam cross section with an axis ratio of 1:3.

The effective focal lengths are  $f'$  30 x 90 mm.

The state of polarization is circular and can be left-handed or right-handed.

### Optical design

The radiation of the fiber is collimated to a beam with a diameter in the range  $\varnothing$  1 - 4 mm. In this collimated beam a low-order quarter-wave plate changes the state of polarization from linear to left-handed or to right-handed circular. An adjacent anamorphic beam shaping optics transforms the circular beam into a beam with an elliptical cross section. Finally the beam is expanded to the desired diameter.

**Adjustment of focus**

All fiber collimators of series 60FC-E are aligned for the specified wavelength. In case of need you can change the distance between fiber end-face and the first collimating optics by means of an eccentric key. The lens does not rotate when adjusting the focus in both cases. The final focus setting is locked by means of two radially arranged clamping screws. Additionally attachment optics can be mounted to the front of the collimator

**Optimum lens performance**

The angled polish of connectors of type APC is considered by a [pre-angled mechanical coupling axis](#) that compensates the beam deflection and you can use the lens centrally. This minimizes aberrations simply resulting from a non-ideal beam path through the lens.

**Connector Type**


The fiber collimator is equipped with a type FC APC receptacles. An additional grub screw fixes the spring loaded ferrule of the fiber connector in order to increase pointing stability.

**Housing material**

The fiber collimators are made of nickel silver and black anodized aluminum.

**Mounting**

The collimators series 60FC-E all possess a flange for low-strain mounting e.g. using the clamp collars [series CC](#).

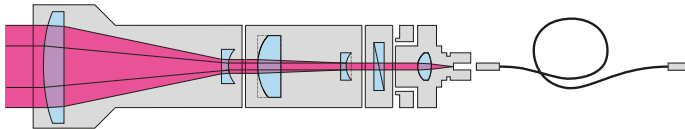

## TECHNICAL DATA

60FC-E-Q671-4-F30x90

Type	60FC-E
Order Code	60FC-E-Q671-4-F30x90
Eff. focal lengths	30 x 90 mm
Aspect ratio	1 : 3
Quarter-wave plate	Low-order
Clear aperture	20 mm
Elements/Groups	9/6

Wavelength range	650 - 830 nm
Alignment wavelength	671 nm
Fiber connection	FC/APC
Outer diameter	Ø 32/34.5 mm
Total length	153 mm
Material	Nickel silver and black anodized aluminum
Weight	

## DOWNLOADS



[980241100506.pdf \(Dimensional drawing\)](#)

## RELATED PRODUCTS

### POLARIZATION ANALYZER SK010PA

Measurement tool for coupling into polarization-maintaining fiber cables

### FIBER CABLES PMC

Polarization-maintaining fiber cables

### 60FC-E-4-F30X90-671

Fiber collimator for an elliptical beam cross section

This is a printout of the page <https://sukhamburg.com/products/details/60FC-E-Q671-4-F30x90> from 5/5/2024

## CONTACT

For more information please contact:

Schäfter + Kirchhoff GmbH

Kieler Str. 212

22525 Hamburg

Germany

Tel: +49 40 85 39 97-0

Fax: +49 40 85 39 97-79

[info@sukhamburg.de](mailto:info@sukhamburg.de)

[www.sukhamburg.com](http://www.sukhamburg.com)

## LEGAL NOTICE

**Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.**

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [\[more\]](#)