


5M-A18+55CM-635-10-H10-A8-CS-7

Compact Laser Micro Focus Generator with elliptical Gaussian beam profile

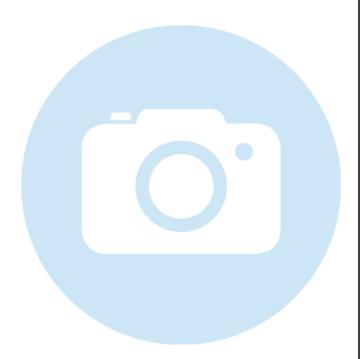

FEATURES

Compact Laser spot with elliptical Gaussian beam profile.

Spot diameter: 0.003 x 0.008 mm

Wavelength: 635 nm

Working distance: 16.5 mm

- Micro Focus Generator for small spot widths and high power density in the focal plane
- With RS232 interface





DESCRIPTION

The laser diode beam source type 5M-A18+55CM-635-10-H10-A8-CS-7 produces an elliptical laser spot with elliptical Gaussian intensity distribution.

The laser has integrated electronics <u>type CS</u> for control of the laser output power and serial interface (RS232). The output power can be controlled using the <u>modulation input ports (TTL and analog)</u> or manually using the potentiometer.

The working distance can be adjusted by adjusting the focus setting. Please note that the spot diameter increases proportionally to the working distance. A fine-adjustment of the distance between laser and target is recommended for fine-focusing.

TECHNICAL DATA

5M-A18+55CM-635-10-H10-A8-CS-7



Series		5M
Order Code	5M-A18+55CM-635-10-H10-A8-CS-7	
Line profile	Gaussian Intensity Distribution	
Wavelength	635 +10/-10 nm	
Laser output power	10 mW	
Laser safety class	3В	
Focussing range	15-35 mm	
Working distance	16.5 mm	
Spot height	0.008 mm	
Spot width	0.003 mm	
Rayleigh range	0.022 mm	
Diameter laser module	25/28 mm	
Module length	76.4 mm	
Installation length	122.9 mm	
Cable length	1.5 m	
Connector type	Lumberg SV70 IEC 61076-2-106	
Supply voltage	5 ± 0.2 V	
Max. current consumption	0.25 A	
Working temperature		0 - 40 °C
Modulation inputs	Analog	TTL
Input resistance	9 kOhm	9 kOhm
Max. modulation frequency	0.001 kHz	250 kHz
Modulation delay ON/OFF	3000/3000 μs	0.5/0.2 μs
Rise / Fall time	200000/200000 μs	0.8/0.4 μs
nterface RS232		

ACCESSORIES

60EX-4 Eccentric key with a stroke of \pm 0.5 mm.

60EX-4-L Alternative eccentric key with long handle with a

stroke of ± 0.5 mm.

9D-12 Screwdriver WS 1.2

RELATED PRODUCTS



LASER MODULES

Compact Laser Macro Focus Generator

SERIES 5MM

Circular beam profile andExtended depth of focus

LASER MODULES

Micro Focus Generator

SERIES 13MC

Rotationally symmetric, Gaussian beam profile

LASER MODULES

Compact Laser Micro Focus Generator

SERIES 5MC

Rotationally symmetric, Gaussian beam profile

LASER MODULES

Micro Focus Generator

SERIES 13M

Elliptical Gaussian beam profile

This is a printout of the page https://sukhamburg.com/products/details/5M-A18 55CM-635-10-H10-A8-CS-7 from 5/4/2024

CONTACT

For more information please contact: Schäfter + Kirchhoff GmbH Kieler Str. 212 22525 Hamburg Germany

Tel: +49 40 85 39 97-0 Fax: +49 40 85 39 97-79

info@sukhamburg.de www.sukhamburg.com

LEGAL NOTICE

Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [more]