

51nano-N-660-28-H26-P-5-2-18-0-150

Fiber-coupled low coherence laser source with single-mode fiber cable (OEM version)



FEATURES

The Laser Diode Beam Source of type 51nano-N-660-28-H26-P-5-2-18-0-150 has a [reduced power noise](#), [a reduced coherence length](#) and [a low speckle contrast](#).

- Reduced power noise: typ. < 0.08 % of P_0 (RMS, Bandwidth < 1 MHz)
- Reduced coherence length: coherence length \approx 300 μm
- Reduced speckle contrast
- Wavelength: 660 nm
- Laser output power: 28 mW
- Single-mode fiber cable
- FC APC connector (8°-polish)
- Modulation analog and TTL
- OEM version w/o interlock and w/o key switch

Alternative: Laser Diode Beam Source [51nano-S](#) (with key switch and interlock) or with [single-mode](#) fiber cable

DESCRIPTION

The fiber-coupled Laser Diode Beam Source of type 51nano-N-660-28-H26-P-5-2-18-0-150 has a [reduced power noise](#) (typ. < 0.08 % of P_0 (RMS, Bandwidth < 1 MHz)), [reduced coherence length](#) (\approx 300 μm) and [a lowered speckle contrast](#).

Electrical features

The output power is adjustable using a potentiometer or using the two modulation inputs for analog and TTL.

Fiber cable

The source is fiber-coupled to a single-mode fiber cable. As a result the beam profile is rotationally symmetric with Gaussian intensity distribution. The fiber cable is equipped with an FC APC type connector (8°-polish). The fiber cable has a strain-relief and a protective sleeving (Ø 3 mm). Standard cable length is 150 cm.

Options:

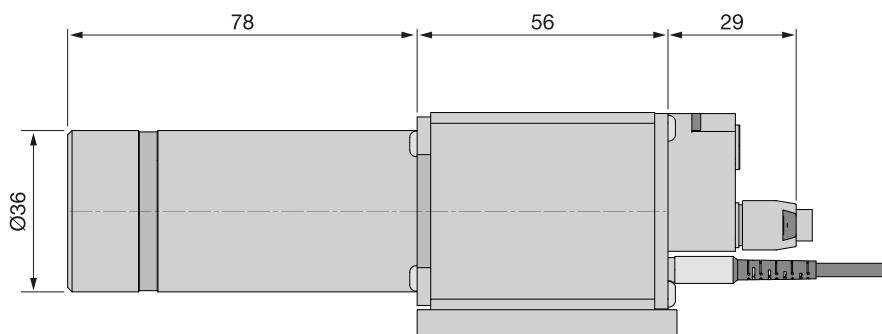
- Polarization-maintaining fiber
- Core-centered (single-mode only)
- Multiple fiber output cables (51nanoC, single-mode only)
- Other connector types including FC PC, DIN or AVIO, or E2000
- Other fiber cable lengths
- Incorporated vacuum feed-through

Laser safety

This OEM version has no key switch or interlock and is not conform to EN 60825-1.

It can be operated conform to EN 60825-1 by using a [switchbox](#).

As an alternative, a version with key switch and with interlock (conform to EN 60825-1) is available as type [51nano-S](#).

**TECHNICAL DATA**

51nano-N-660-28-H26-P-5-2-18-0-150

Order Code	51nano-N-660-28-H26-P-5-2-18-0-150
Will replace	51nanoFCM-N-660-28-H26-P-5-2-18-0-150
Series	51nano-N (single-mode)
Laser class	3B
Wavelength	660 ± 8 nm
Band width	0.7 - 4 nm
Output power	typ. 28 mW
Power adjustment	< 1 - 100 %

Power noise typ. < 0.08 % of P_0 (RMS, BW < 1 MHz)

Coherence length $\approx 300 \mu\text{m}$

Fiber cable single-mode

Fiber type SMC-630

Nominal fiber NA 0.12

Effective fiber NA_e^2 $0.072 \pm 10 \% (1/e^2)$

Mode field diameter MFD $5.8 \mu\text{m} \pm 10 \% (1/e^2)$

Fiber cable length $1.5 \pm 0.05 \text{ m}$ (standard)

Fiber cable type $\varnothing 3 \text{ mm}$ with Kevlar strain-relief

Fiber connector type FC APC (standard)

Power stability max. 12 % power variation between 15°C and 35°C

Electronics type H

Electr. cable length $1.5 \pm 0.1 \text{ m}$ (standard)

Connector type 5 pin (male, Lumberg SV50)

Supply voltage $5.0 \pm 0.2 \text{ V}$

Max. current consumption* 260 mA

Modulation inputs	Analog	TTL
--------------------------	--------	-----

Max. input voltage	5 V	5 V
---------------------------	-----	-----

Voltage for P_{\min} / P_0	0 V / 2.5 V	< 0.8 V / > 2.4 V
--	-------------	-------------------

Input impedance	22 kOhm	22 kOhm
------------------------	---------	---------

Max. modulation frequency	100 kHz	100 kHz
----------------------------------	---------	---------

Time delay ON/OFF*	2/0.3 μs	1.5/0.1 μs
---------------------------	---------------------	-----------------------

Rise / fall time*	1.0/1.0 μs	1.0/1.0 μs
--------------------------	-----------------------	-----------------------

* Typical value. Depends on laser diode.

Operating temperature $15 - 35^\circ\text{C} \pm 0.5^\circ\text{C}$

Warm-up time approx. 10 min

Air humidity max. 90 % non-condensing

Weight 530 g

Dimensions 50 x 58 x 166 mm

Protection Class IP30

Dimensions (for a complete dimensional drawing please refer to the downloads section)



TECHNOTES

- [Fiber-coupled low noise beam source](#)
[Comparison of a low noise laser source to a conventional laser source](#)
- [51nano: Electronics Type H](#)
[Electronic features for electronics type H](#)

DOWNLOADS



[000824000400.pdf \(Dimensional drawing\).](#)



[Conformity_51nano_2023_E_web.PDF \(CE certificate\).](#)

ACCESSORIES

PS051003E

Power Supply 5 V

SBN050501

For laser diode beam sources of electronics type S/C/P/H and 5 V power supply

**FIBER COLLIMATORS
SINGLE-MODE/PM**

Fiber Collimators for collimating light exiting a single-mode or polarization-maintaining fiber cable

RELATED PRODUCTS

**51NANO-N
(POLARIZATION-
MAINTAINING, OEM)**

Fiber-coupled low coherence laser source with
polarization-maintaining fiber cable (OEM version)

**51NANO-S (SINGLE-
MODE)**

Fiber-coupled low coherence laser source with
single-mode fiber cable

**51NANOFI-N WITH
FARADAY ISOLATOR
(SM/OEM)**

Fiber-coupled low coherence laser source with
single-mode fiber cable (OEM version)

This is a printout of the page <https://sukhamburg.com/products/details/51nano-N-660-28-H26-P-5-2-18-0-150> from 5/3/2024

CONTACT

For more information please contact:

Schäfter + Kirchhoff GmbH

Kieler Str. 212

22525 Hamburg

Germany

Tel: +49 40 85 39 97-0

Fax: +49 40 85 39 97-79

info@sukhamburg.de

www.sukhamburg.com

LEGAL NOTICE

Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [\[more\]](#)